


1. Application

EUROFLEX® S- & C- Block are the new dimension of design-elements. With those elements architects, designer and municipalities have the possibility to create individually sitting and jumping elements. The S- & C-Block are produced eco- friendly and could be recycled to 100%.

2. Material

2.1 Shaped piece completely base on recycled granulate

Rubber granulate: recycling granulate
Binder: MDI polyurethane
Colour: red, grey, grey, black

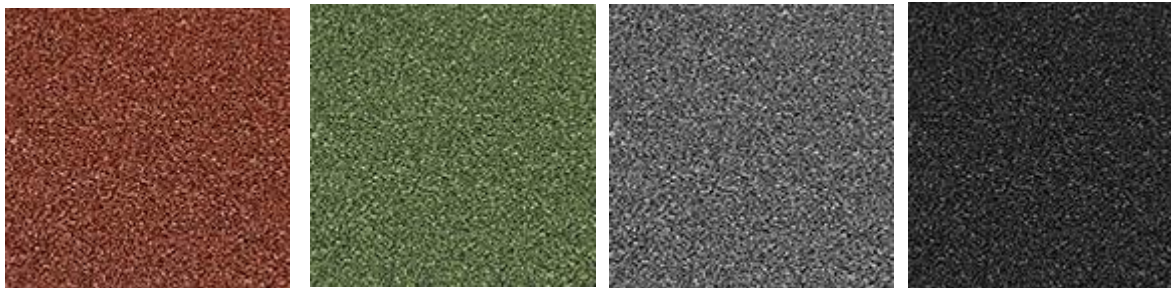

2.2. Shaped piece with polystyrene – core and EPDM Topping

Topping: full colored EPDM rubber granulate
Binder: MDI polyurethane
Colour: EPDM colour palette

EPDM standard colours

RAL 1014



RAL 1015



RAL 1002



RAL 6021



RAL 3016



RAL 5015



RAL 7038



EPDM special colours

RAL 7037



RAL 7011




RAL 4005



RAL 5012



RAL 5010



RAL 6017



RAL 6005



RAL 1012



RAL 2008



RAL 3017



RAL 4003



RAL 8024




RAL 8025





3. Product Design

Surface: with open pores
Design standard:

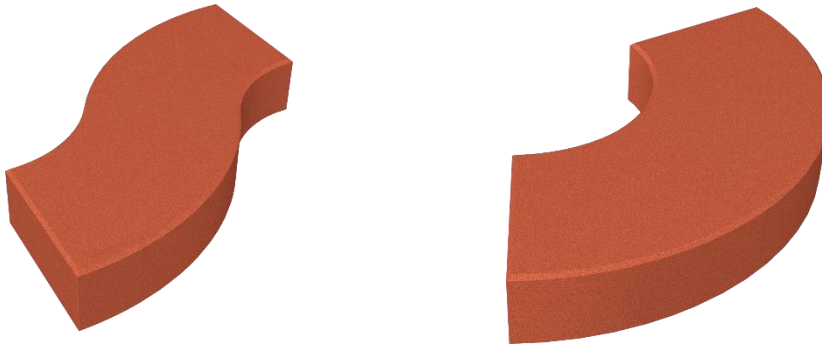


Design EPDM:

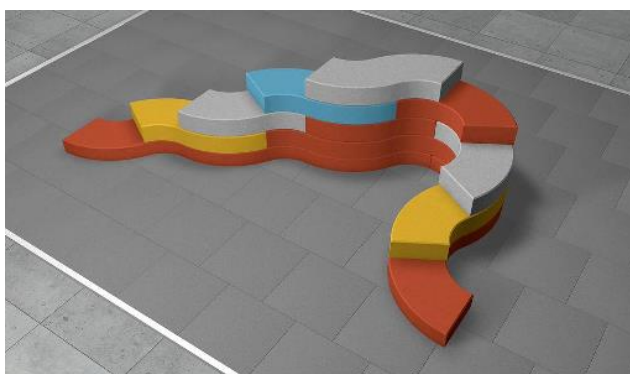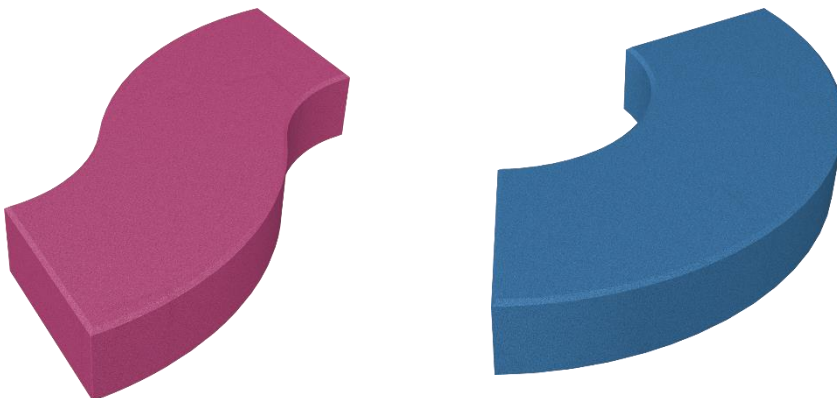

minor colour variations and/or fading possible


S- & C- Block

4. Dimension / Tolerance S – Block

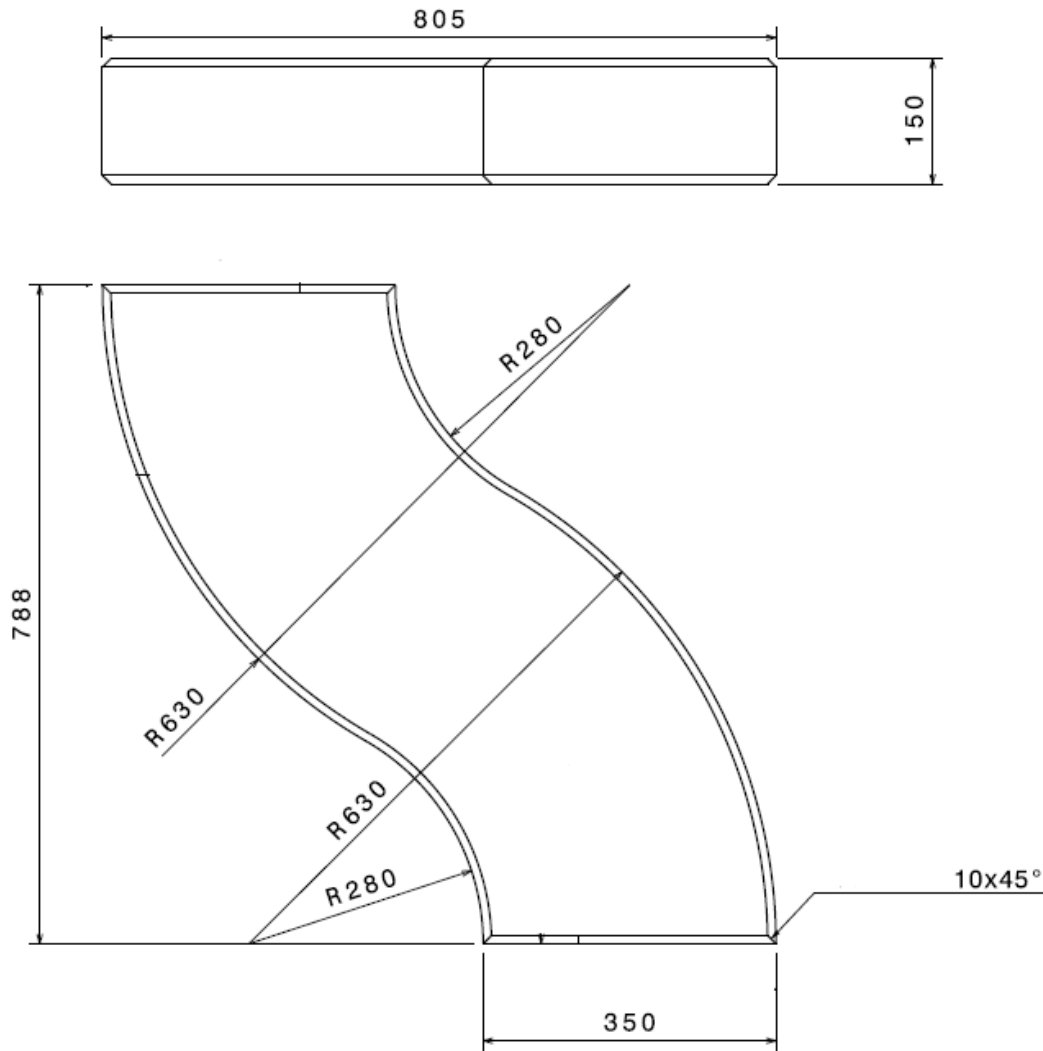

Tolerance:	+/- 0,8%
Weight standard:	approx. 38,5 kg/piece
Weight EPDM covered:	approx. 34,8 kg/piece

5. Dimension / Tolerance C – Block

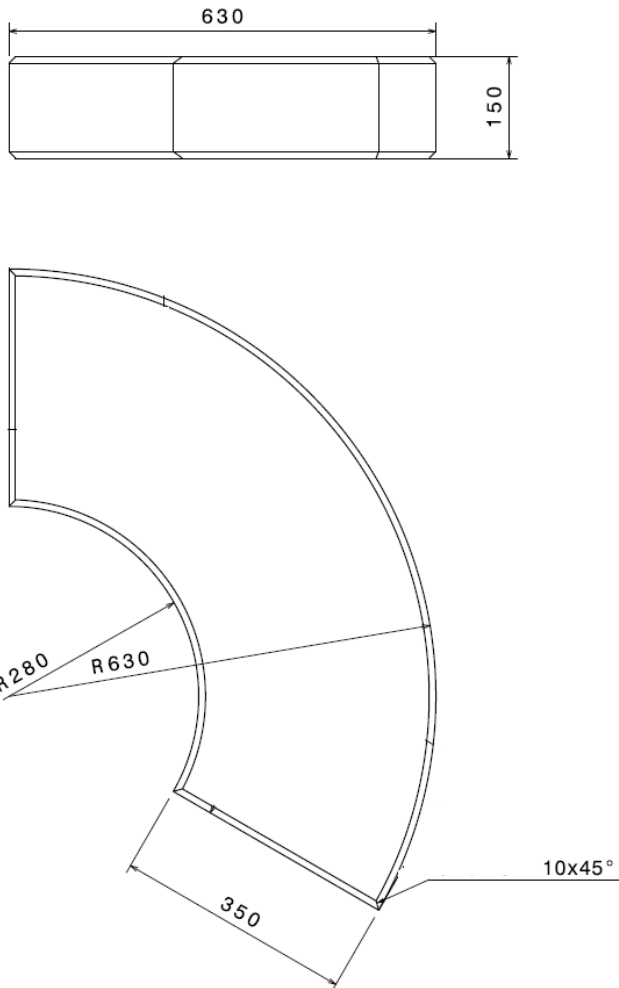

Tolerance:	+/- 0,8%
Weight SBR:	approx. 38,5 kg/ piece
Weight EPDM covered:	approx. 36,0 kg/ piece

6. Test Data

Production facility inspection

Fire resistance: E (DIN EN 13501-1, 2002)