

1. Application

EUROFLEX® Design Elements can be used individually for sitting or in combination as decorative arrangement elements in pedestrian areas, shopping malls or parks. EUROFLEX® Design elements are manufactured by an environment-friendly process and can be recycled as processes raw material at the end of their service life.


2. Material

Rubber granulate: granulated recycled rubber
Binding agent: MDI polyurethane
Topping: Coloured EPDM rubber granulate
Colour:

3. Characteristics


Surface: minor colour variation possible
smooth with open pores
In accordance with the colour chart

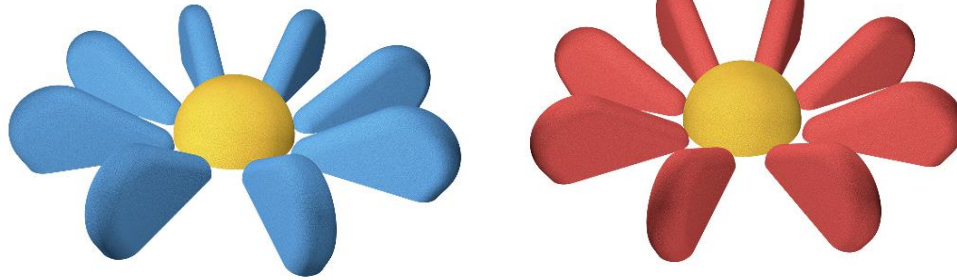

4. Dimension**Version 1**



Half heart standing with 2 steel anchors:

Dimension steel anchors: \varnothing 31,8 mm, length approx. 750 mm

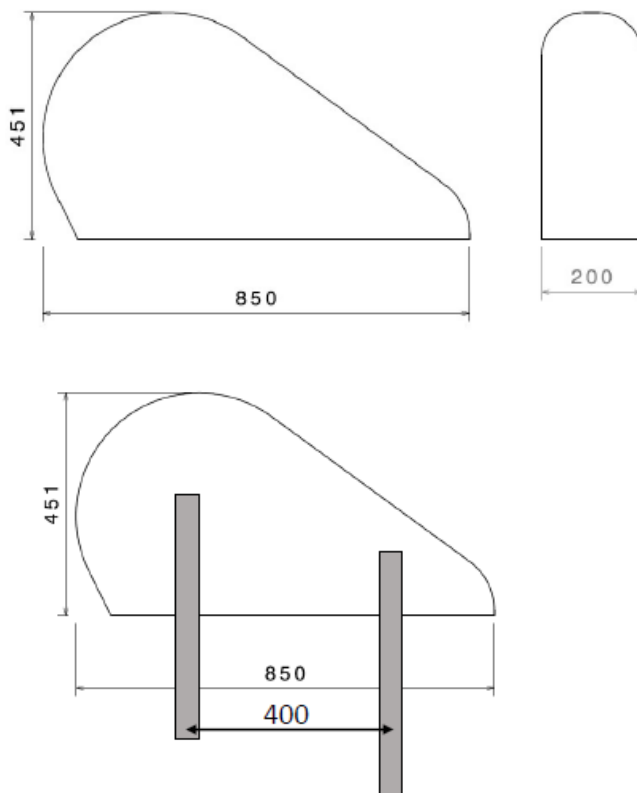


Version 2

Heart lying consist on two half heart each with 2 steel anchors:

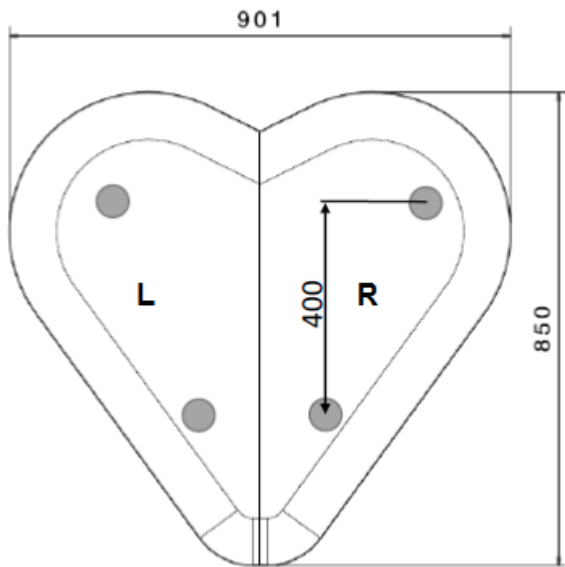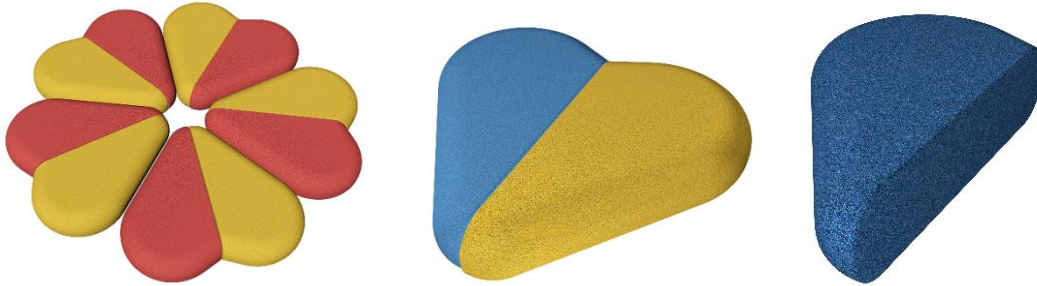

Half heart lying

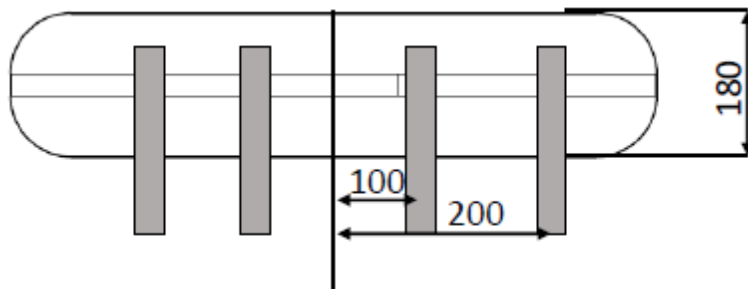

Weight: half heart approx. 37kg
Thickness: 180mm
Dimension steel anchors: \varnothing 31,8 mm, length approx. 300 mm

**Attention: Each version can be installed only as shown in the corresponding picture above.
The holes for insert the steel anchor are in both versions different.**

5. Test Data

EN 1176-1:2017

Production facility inspection

EPDM tests:

Fire classification: Cfl-s1 DIN EN 13501-1:2010

Hardness: 62 \pm 5 Shore A

Migration certain elements: EN 71-3

6. Installation instruction

The subbase must be even. The product can be installed directly on unbounded or bonded subbase.

Please note the complete installation instruction.